



Lysaght Quika-Floor®

Steel flooring system

What is a LYSAGHT QUIKA-FLOOR?

LYSAGHT QUIKA-FLOOR® is a fully engineered and certified steel sub-floor system. QUIKA-FLOOR is the steel alternative to conventional timber bearers and joists and is suitable for both brick veneer and freestanding houses with a maximum fall of land of 4.0 m. Bearers and joists have a large spanning capacity, typically up to 2700 mm.

QUIKA-FLOOR Components

The QUIKA-FLOOR system is comprised of the following components:

- Hot dipped galvanised UNI-PIERS®, each adjustable up to 200 mm
- Galvanised steel bearers, generally 150 mm deep
- ZINCALUME® steel joists, 120 mm deep
- Galvanised load bearing joists, 120 mm deep
- Accessories such as load bearing angles, angle bracing, bracketry, and screws.

Why choose LYSAGHT QUIKA-FLOOR?

LYSAGHT QUIKA-FLOOR is termite, fire and corrosion resistant. All flooring members have been galvanised, hot dip galvanised or have a ZINCALUME® steel coating. Steel is strong. It doesn't burn, and termites don't eat it. Product shapes and fixings ensure quick and easy installation, and pre-cut components save time and labour costs on-site. That's what makes QUIKA-FLOOR a safe, reliable choice for a flooring system.

Quality assured from the ground up

QUIKA-FLOOR complies with the following Australian Standards: AS 1170.1-2002, AS 1170.2-2002, AS 4055-1992, AS/NZS 4600-1996, AS 3623-1993 and the Building Code of Australia. Component designs have been tested in our NATA-registered laboratory. With over 130 years developing products for Australia, QUIKA-FLOOR is engineered and certified by BlueScope Lysaght's engineers.



House Framing Products



Structural Products



Rainwater Products



Fencing Products



Roofing & Walling Products



Customer Support




Home Improvements

Design advantages of LYSAGHT QUIKA-FLOOR

- Fast and easy to install so you save money
- Termite resistant with an integral ant-cap
- All members below the floor will not burn in fire
- Positive fixing methods ensure minimal bounce or squeaks from the floor
- Corrosion resistance is excellent because all flooring members have been galvanised, hot dip galvanised or have a ZINCALUME® steel coating
- Pre-cut components save time/labour costs on-site
- Product shapes and fixings allow quick & easy installation
- Strength of steel can be used to reduce pier numbers and therefore footings
- Lightweight products will reduce or eliminate need for crane hire saving you money
- LYSAGHT QUIKA-FLOOR is engineered and certified by BlueScope Lysaght's design team

Schematic Diagram of QUIKA-FLOOR System

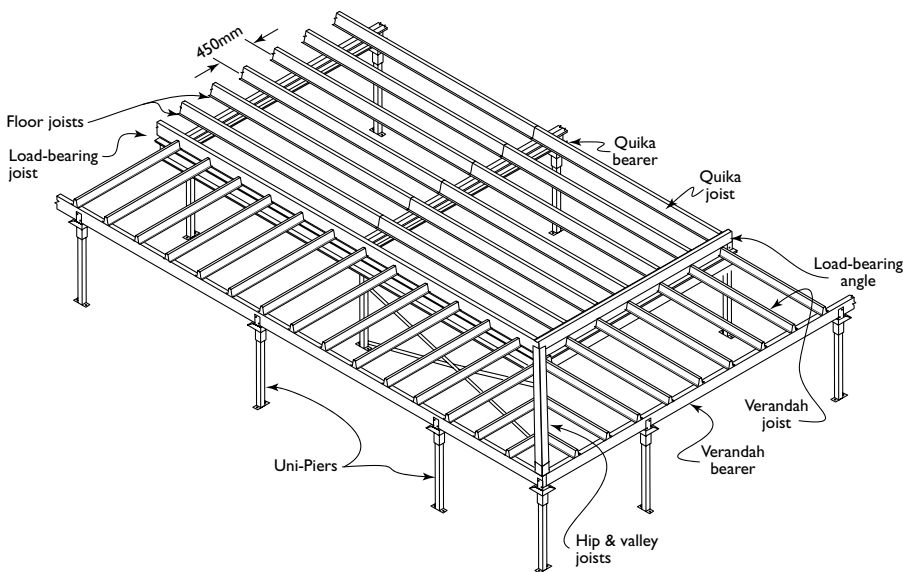

Disclaimer, warranties and limitation of liability

This publication is intended to be an aid for all trades and professionals involved with specifying and installing Lysaght products and not to be a substitute for professional judgement.

Terms and conditions of sale available at local BlueScope Lysaght sales offices.

Except to the extent to which liability may not lawfully be excluded or limited, BlueScope Steel Limited will not be under or incur any liability to you for any direct or indirect loss or damage (including, without limitation, consequential loss or damage such as loss of profit or anticipated profit, loss of use, damage to goodwill and loss due to delay) however caused (including, without limitation, breach of contract, negligence and/or breach of statute), which you may suffer or incur in connection with this publication.

© Copyright BlueScope Steel Limited November 29, 2007

How to obtain a price for a LYSAGHT QUIKA-FLOOR

To obtain an accurate, obligation free quote for a LYSAGHT QUIKA-FLOOR system, fax or post a clear set of plans to the QUIKA-FLOOR estimator in your state. Every plan received is priced individually to ensure you receive the most cost effective design for your project.

Include the following information to ensure an accurate quote:

Provide a dimensioned floor plan, and any elevations you may have. Provide the approx. height off the ground. Advise if you require any verandahs or decks to be priced and provide a Site Address for delivery.

Return contact details for BlueScope Lysaght to supply the quote.

NSW

QUIKA-FLOOR Estimator
PO Box 2283, Smithfield NSW 2164
Ph: 02 9892 4000 Fax 02 9892 4999

VIC/TAS

QUIKA-FLOOR Estimator
PO Box 5005, Hallam Business Centre
Hallam 3803
Ph 03 8795 2100 Fax: 03 8795 2133

QLD

QUIKA-FLOOR Estimator
PO Box 431, Archerfield QLD 4702
Ph: 07 3722 1200 Fax 07 37221233
lysaghtrockleasales@bluescopesteel.com

SA

QUIKA-FLOOR Estimator
PO Box 69, Rosewater East 5013
Ph: 08 8447 9609 Fax 08 8447 9692

WA

QUIKA-FLOOR Estimator
PO Box 308, Forrestfield
Western Australia 6058
Ph: 08 9454 1111 Fax 08 9454 1122

Product Samples

Product Literature



Technical Support

Online Information

Information, brochures and your local distributor **1800 641 417**

Please check the latest information which is always available at www.lysaght.com

LYSAGHT and ZINCALUME are registered trademarks of BlueScope Steel Limited, ABN 16 000 011 058.

Quika-floor and Uni-Pier are registered trademarks of Quika-floor Pty Ltd. Used by permission.

The LYSAGHT® range of products is exclusively made by BlueScope Steel Limited trading as BlueScope Lysaght.

Printed by BMP 2M1107



9 320075 052614